

Millstadt Police Department

Chief of Police
Alan J. Hucke

108 W. White, Millstadt IL 62260

Phone: (618) 476-7250

Fax: (618) 476-9160

Dear Homebuilder,

The Village of Millstadt is very concerned about erosion control during the process of new construction. Mud that accumulates on our roadway may have negative impacts for our village in multiple ways. First, it can be a hazard to our motorists who use the roadways. Many citizens have contacted our department and the Village Office when the roads have become hazardous. Secondly, failure to control erosion leads to the dirt and mud polluting our nearby waterways such as creeks and lakes.

Per local ordinance, you are responsible as a homebuilder to maintain a silt fence or other barrier to maintain erosion control and keep the mud off our roadways.

Please be advised, if you fail to erect and/or adequately maintain the proper barrier to control the erosion *you will be issued a citation under local ordinance by the police department.*

We hope we can control this problem without resorting to citations. We do not expect the streets to be spotless. However, we do expect homebuilders to keep most of the mud off the roadway and out of our water systems.


Thank you in advance for your cooperation in this matter. If you have any questions feel free to contact Adam Romero, the Village Building Commissioner, and he can answer your questions about the specifics of the silt fences or other barriers that need to be installed. You can contact him through the Village Hall at 618-476-1514.

Best regards,



Alan J. Hucke
Chief of Police

APPENDIX C: LOT TERMS

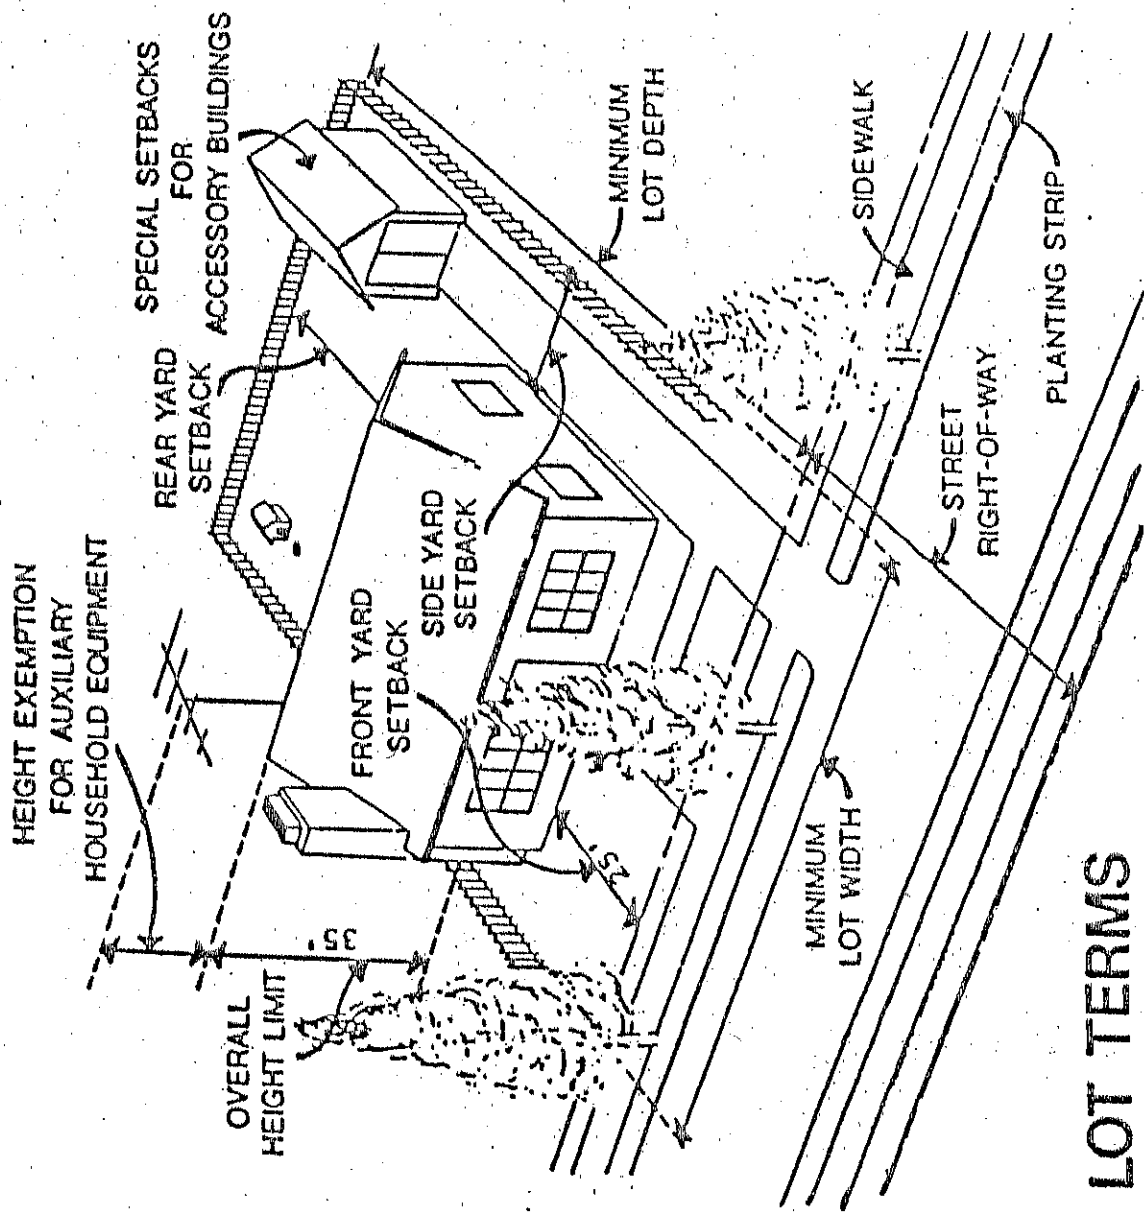

LOT TERMS



COUNTY OF ST. CLAIR

DEPARTMENT OF BUILDING & ZONING



PHONE (618) 277-6600
FAX (618) 277-0482

10 PUBLIC SQUARE
BELLEVILLE, ILLINOIS 62220-1623
WWW.CO.ST-CLAIR.IL.US

NOTICE


ST CLAIR COUNTY IN ITS UNINCORPORATED AREAS AS WELL AS THE MUNICIPALITIES IT INSPECTS REQUIRE A "GROUND BLOCK" ON ALL NEW HOMES AND ON SERVICE UPGRADES OR CHANGES AFTER OCTOBER 01, 2009.

- A) THE GROUND BLOCK SHALL BE U.L. LISTED FOR THE PURPOSE AND HAVE AT LEAST FOUR MECHANICAL OPENINGS FOR WIRES FROM #4 TO #14.
- B) IT SHALL BE ATTACHED TO THE GROUND ROD WITH #4 OR #6 WIRE AND AN APPROVED GROUND CLAMP.
- C) THE GROUND WIRE SHALL BE IN 1/2" P.V.C CONDUIT WITH ONE END OF THE CONDUIT EMBEDDED IN THE EARTH AND THE CONDUIT SHALL EXTEND AT LEAST TWELVE INCHES ABOVE GRADE. THE CONDUIT SHALL HAVE A STRAP SECURING IT IN PLACE.
- D) NO CONNECTOR IS NEEDED TO CONNECT THE GROUND BLOCK TO THE 1/2" P.V.C. CONDUIT.

(Illustration on back)

LEGEND

- Equipment Bonding Jumper - (Note 2)
- Grounding Electrode Conductor - No. 6
- Copper unless Local Code requires larger

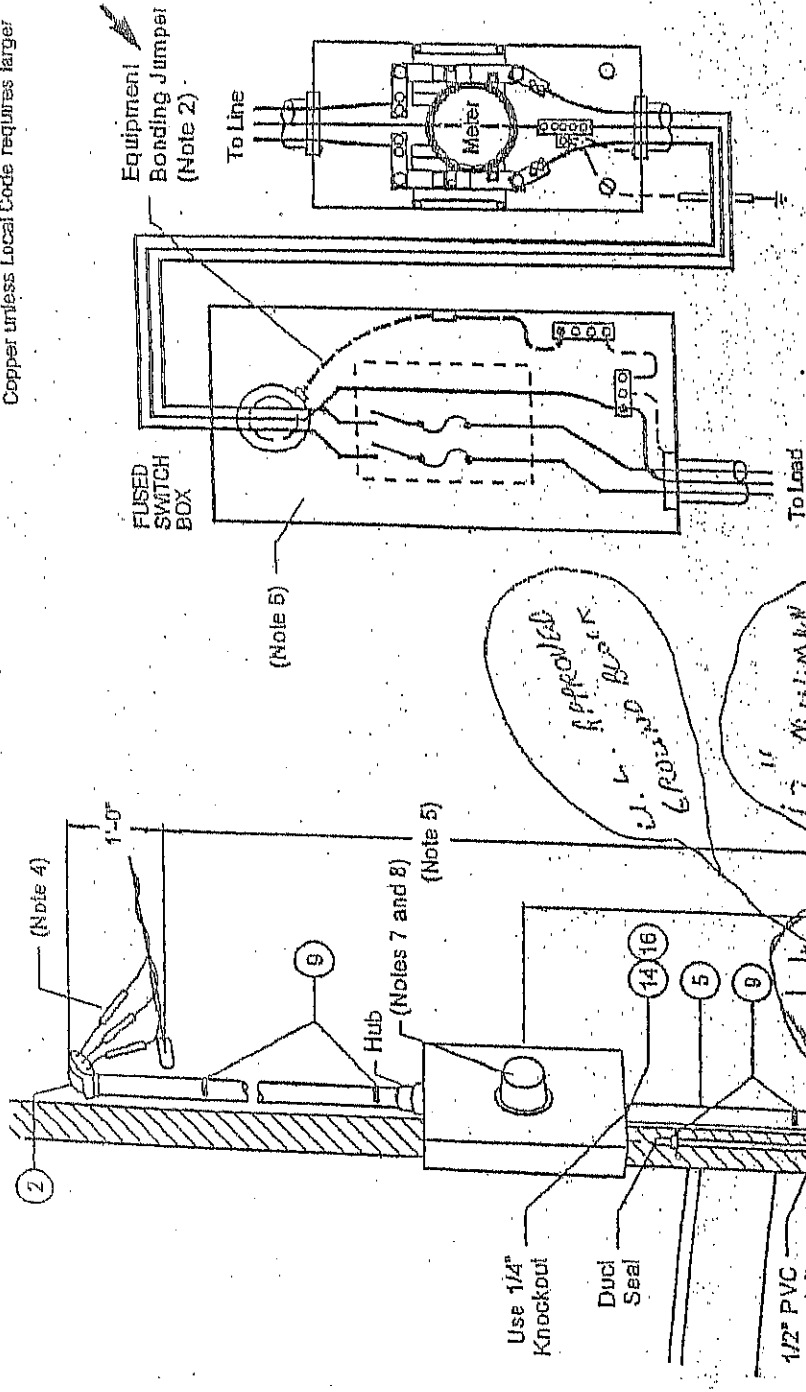

Wiring Diagram

Notes:
 1) Before installing electrical facilities check for compliance with local codes as well as the N.E.C. and requirements stated in Note 4.

2) All equipment bonding jumpers to be sized according to table on back. Equipment bonding jumper shall be permitted to be bare, covered, or insulated. Individually covered or insulated equipment jumper shall have a continuous outer finish that is either green or green with one or more yellow stripes.

3) N.E.C. approved clamp. Leave uncovered until after inspection.
 4) Approximately 3 feet of conductor will extend from weatherhead. All conductors should be the same size. The neutral to be natural gray or white in color.

5) All service supports must be furnished and installed by customer to provide not less than 10' ground clearance where service is subject to pedestrian traffic only; 12' over residential property. Driveways and commercial areas which are not subject to truck traffic; 16' minimum (18' recommended) over public streets, alleys, roads and parking areas subject to truck traffic.

6) The main service disconnect means shall be installed at the nearest readily accessible location (or immediately behind the wall where it enters the building if possible).

7) The electric meter, fuse box, and switch should be installed at least 18" horizontally from gas meter set. When conditions allow, a spacing of 36" is preferable.

8) Customer provided socket must meet 10-2.815 through 2.617.



County of St. Clair
Building & Zoning Department
10 Public Square
Belleville, Illinois 62220

Anne Markezich, Director (618) 277-6600 Ext. 2530
Schedule Inspections (618) 277-6600 Ext. 2644
Hours 8:00 a.m. - 4:30 p.m.

BUILDING INFORMATION SHEET

Application for a permit shall be made by the owner or lessee of the building or structure, or agent of either or by the registered design professional employed in connection with the proposed work.

Property must have an assigned address from the 9-1-1 Coordinating office prior to a building permit being issued. The 9-1-1 Coordinating office is located at 101 First St., Belleville, Illinois; phone number is (618) 277-7316.

Prior to applying for a building permit you must first generate an Energy Code Compliance Certificate using energycodes.gov/rescheck for residential or energycodes.gov/comcheck for commercial.

If this is an application for a residential structure (1) one set of plans drawn to scale to be submitted with Building Application (Application for Zoning Compliance).

If this is an application for a commercial/industrial structure, (1) one set of plans drawn to scale and specifications designed by the architect that is licensed and registered in the State of Illinois must accompany this application. The seal must appear on all sheets of the plans and specifications. You must also have a letter from the architect indicating that the plans are for construction as being submitted.

Plan review fee effective January, 1 2020. The Commercial fee will be \$100 and residential will be \$75.

48-hour review period of all permits.

INSPECTIONS GUIDELINES

1. Property shall be marked with address.
2. Building permit shall be posted.
3. Must call **24 hours** prior to needing any inspection. Please have your permit number; construction address and owners name prior to calling.
4. All required inspections are covered under building permit.
5. Upon failing an inspection a **\$75.00 re-inspection fee** must be paid prior to next inspection.

BUILDING CODE REGULATION

St. Clair County has adopted the International Building Code 2012 with the following amendments for the unincorporated areas of the County.

Building Code; Amendments. The following provisions shall further apply and shall supersede any and all references listed within the adopted edition of the International Building Code - 2012 Edition.

- A. Chapter 11 Accessibility** Insert the following text. When there is a conflict between this Chapter and the Illinois Accessibility Code the stricter of the two shall apply.
- B. Establishment of flood hazard areas** amended to read as follows. To establish flood hazard areas, the governing body shall adopt a flood hazard map and supporting data. The flood hazard map shall include, at a minimum, areas of special flood hazard as identified by the Federal Emergency Management Agency in an engineering report entitled "The Flood Insurance Study for County of St. Clair," dated November 5, 2003, as amended or revised with the accompanying Flood Insurance Rate Map (FIRM) and Flood Boundary and Floodway Map (FBFM) and related supporting data along with any revisions thereto. The adopted flood hazard map and supporting data are hereby adopted by reference and declared to be part of this section.
- C.** Section 1805 Footings and Foundation all references to wood footings and foundation are deleted. The use of wood footings and foundation is prohibited.
- D.** Delete all and any reference to the ICC Electrical Code and insert the National Electric Code 2011 edition.
- E.** Delete all and any reference to the International Plumbing Code and add the following: "The County Building Official shall require that the provisions of the current "Illinois Plumbing Code Law", 225 Illinois Compiled Statutes 320/1 et seq., as presently in force or as the same may be hereafter amended or modified and the same is hereby incorporated herein by reference and adopted as the standard for the purposes of this Chapter. Any conflicts concerning the provisions of these codes shall be determined by the strictest standard contained in the code provisions."
- F.** Section 2902 Plumbing Systems delete this section in its entirety and replace with Article XII.
- G.** Section 3410.2 **Applicability** amended to read the following. Structures existing prior to 1978, in which there is work involving additions, alterations or changes of occupancy shall be made to conform to the requirements of this section or the provisions of Sections 3403 through 3407. The provisions in Sections 3410.2.1 through 3410.2.5 shall apply to existing occupancies that will continue to be, or are proposed to be, in Groups A, B, E, F, M, R, S and U. These provisions shall not apply to buildings with occupancies in Group H or I.
- H.** Adopt Appendix F – Rodent proofing.
- I.** Adopt Appendix F – Flood-Resistant Construction.
- J.** Adopt Appendix J – Grading.

RESIDENTIAL CODE REGULATIONS

St. Clair County has adopted the International Residential Code 2012 with the following amendments for the unincorporated areas of the County.

Residential Code; Amendments. The following provisions shall further apply and shall supersede any and all references listed within the adopted edition of the International Residential Code – 2012 Edition.

- A.** Delete all and any reference to the ICC Electrical Code and insert the National Electric Code 2011 edition.
- B.** Delete all and any reference to the International Plumbing Code and add the following: "The County Building Official shall require that the revisions of the current "Illinois Plumbing Code Law", 225 Illinois Compiled Statutes 320/1 et seq., as presently in force or as the same may be hereafter amended or

Revised 01/09/20

modified and the same is hereby incorporated herein by reference and adopted as the standard for the purposes of this Chapter. Any conflicts concerning the provisions of these codes shall be determined by the strictest standard contained in the code provisions.

- C. Delete all and any reference to wood footings and foundation are deleted. The use of wood footings and foundations is prohibited.
- D. Adopt Appendix G Swimming Pools, Spas and Hot Tubs
- E. Adopt Appendix H Patio Covers.

MECHANICAL CODE REGULATIONS

St. Clair County has adopted the International Mechanical Code 2012 with the following amendments for the unincorporated areas of the County.

Mechanical Code; Amendments. The following provisions shall further apply and shall supersede any and all references listed within the adopted edition of the International Mechanical Code – 2012 Edition.

- A. Delete all and any reference to the ICC Electrical Code and insert the National Electric Code 2011 edition.
- B. Delete all and any reference to the International Plumbing Code and add the following: The County Building Official shall require that the provisions of the current "Illinois Plumbing Code Law", 225 Illinois Compiled Statutes 320/1 et seq., as presently in force or as the same may be hereafter amended or modified and the same is hereby incorporated herein by reference and adopted as the standard for the purposes of this Chapter. Any conflicts concerning the provisions of these codes shall be determined by the strictest standard contained in the code provisions.

FUEL GAS CODE REGULATIONS

St. Clair County has adopted the International Fuel Gas Code 2012 with the following amendments for the unincorporated areas of the County.

Fuel Gas Code; Amendments. The following provisions shall further apply and shall supersede any and all references listed within the adopted edition of the International Fuel Gas Code – 2012 Edition.

- A. Delete all and any reference to the ICC Electrical Code and insert the National Electric Code 2011 edition.
- B. Delete all and any reference to the International Plumbing Code and add the following: The County Building Official shall require that the provisions of the current "Illinois Plumbing Code Law", 225 Illinois Compiled Statutes 320/1 et seq., as presently in force or as the same may be hereafter amended or modified and the same is hereby incorporated herein by reference and adopted as the standard for the purposes of this Chapter. Any conflicts concerning the provisions of these codes shall be determined by the strictest standard contained in the code provisions.

ENERGY CONSERVATION CODE REGULATIONS

St. Clair County has adopted the Illinois Energy Conservation Code (IECC) 2018 with the following amendments for the unincorporated areas of the County.

- A. **Certificate.** A permanent certificate shall be completed by the builder or registered design professional and posted on a wall in the space where the furnace is located, a utility room or an approved location inside the building. Where located on an electrical panel, the certificate shall not

Revised 01/09/20

cover or obstruct the visibility of the circuit directory label, service disconnect label or other required labels. The certificate shall list the predominant R-values of insulation installed in or on ceiling/roof, walls, foundation (slab, basement wall, crawl space wall and/or floor) and ducts outside conditioned spaces; U-factors for fenestration and the solar heat gain coefficient (SHGC) of fenestration, and the results from any required duct system and building envelope air leakage testing done on the building. Where there is more than one value for each component, the certificate shall list the value covering the largest area. The certificate shall list the types and efficiencies of heating, cooling and service water heating equipment. Where a gas-fired unvented room heater, electric furnace, or baseboard electric heater is installed in the residence, the certificate shall list "gas-fired unvented room heater," "electric furnace" or "baseboard electric heater," as appropriate. An efficiency shall not be listed for gas-fired unvented room heaters, electric furnaces or electric baseboard heaters. Compliance Certificate must list property address, name of individual completing certificate and the version of compliance software tool. NFRC labels must remain on windows for final inspection.

B. Climate Zone 4A

Location	Min. R-Value	Comment
Ceiling/Roof	R-38	R-30 allowed up to 500 sq ft or 20% of total ceiling area.
Walls	R-13	
Foundation Walls	R-10 / 13	R-10 = Continuous insulated sheathing on interior or exterior. R-13 = Cavity insulation at interior of basement wall.
Foundation Slab	R-10 (2ft)	Must be 2 ft below grade add R-5 for heat slab.
Crawl Space Wall and/or Floor	R-10 / 13	R-10 = Continuous insulated sheathing on interior or exterior. R-13 = Cavity insulation at interior wall.
Ducts Outside Conditioned Space	See below under HVAC	
Steel Frame Walls/Floor	Check with Code Official	

C. U-Factors. Windows 0.35 Max. Skylights 0.60 Max.

Exception: Fenestration (Windows).

D. Air Leakage. Following shall be caulked, gasketed, weatherstripped or otherwise sealed with an air barrier material, suitable film or solid material.

1. All joints, seams and penetrations.
2. Site-built windows, doors and skylights.
3. Openings between window and door assembled and their respective jambs and framing.
4. Utility penetrations.
5. Dropped ceilings or chases adjacent to the thermal envelope.
6. Knee Walls.
7. Walls and ceilings separating a garage from conditioned spaces.
8. Behind tubs and showers on exterior walls.
9. Common walls between dwelling units.
10. Attic access openings.
11. Rim joist junction.
12. Other sources of infiltration.

E. Air sealing and insulation. Building envelope tightness and insulation installation shall be considered acceptable when tested air leakage is less than five (5) air changes per hour (ACH) when tested with a blower door at a pressure of 50 pascals (1 PSF). Testing shall occur after rough in and after installation of penetrations of the building envelope, including penetrations for utilities, plumbing, electrical, ventilation and combustion appliances.

F. Fireplaces. New wood-burning fireplaces shall have gasketed doors and outdoor combustion air.

G. Programmable thermostat. A programmable thermostat is required for each separate heating and cooling system.

H. Ducts.

- 1. Insulation (Prescriptive).** Supply ducts in attics shall be insulated to a minimum of R-8. All other ducts shall be insulated to a minimum of R-6.

Exception: Ducts or any portion thereof located completely inside the building thermal envelope requires no insulation.

- 2. Sealing (Mandatory).** All ducts, air handlers, filter boxes and building cavities used as ducts shall be sealed with mastic or silver tape. **NO DUCT TAPE**

- 3. NOTE - Building Cavities cannot be used for return air (must be metal and sealed)**

I. Pools (Mandatory). Pools shall be provided with energy-conserving measures in accordance with the following.

- 1. Pool heaters.** All pool heaters shall be equipped with a readily accessible on-off switch to allow shutting off the heater without adjusting the thermostat setting. Pool heaters fired by natural gas or LPG shall not have continuously burning pilot lights.
- 2. Time switches.** Time switches that can automatically turn off and on heaters and pumps according to a preset schedule shall be installed on swimming pool heaters and pumps.
- 3. Pool covers.** Heated pools shall be equipped with a vapor-retardant pool cover on or at the water surface. Pools heated to more than 90°F (32°C) shall have a pool cover with a minimum insulation value of R-12.

ELECTRICAL CODE REGULATION

St. Clair County has adopted the **2011 National Electrical Code** in its entirety for the unincorporated areas of the county and all communities that have contracted with the county to do their inspections, with the following 12 exceptions:

A. Disconnecting Means and Branch-Circuit Protective Equipment. The minimum size service is 100 Amp. (Article 550-11 NEC 2011)

B. Ground Electrode Conductor. Ground wire shall be copper wire in PVC conduit from meter socket to ground rod. (Article 250-64B NEC 2011)

- C. Feeder or Service Neutral Load.** Entrance conductors and neutral must be of the same size and rating. (Article 220-61 NEC 2011)
- D. Maximum Number Of Disconnects.** All dwelling units' service panels shall have a single main disconnect. On new construction, all service panels shall have **three (3) spaces** for future circuit. No **one-half (1/2) size** circuit breakers permitted on new construction. (Article 230-71 NEC 2011) Note: Also, workspace shall be maintained and center of main breaker no more than 6'6".
- E. Ground Blocks.** All new services, service upgrade or service panel changes require ground blocks. (Article 250-94 NEC 2011)
- F. Conductors Material.** Aluminum wire is permitted for dwelling units. Minimum size aluminum will be 100 AMP capacity. (Article 310-15(B) NEC 2011)
- G. Conductors – Minimum Ampacity and Size.** All power wire 110 volts or higher shall be 12 AWG and larger. (Article 210-24 NEC 2011)
- H. Dwelling Unit Receptacles Outlet.** **Maximum of four (4) receptacles** per circuit in kitchen. Dining room receptacles shall be on a separate circuit from kitchen. All major appliances shall be on a dedicated circuit [dishwasher, disposal, microwave, refrigerator, etc.]. Heating and/or cooling unit blowers shall be on a dedicated circuit. (Article 210-52 NEC 2011) Note: All outlets shall be installed so cords hang down properly.
- I. Non Metallic Sheathed "NM" (Romex).** Is permitted only in residential or dwelling not commercial buildings.
- J. Smoke Detectors & Carbon Monoxide Detectors.** All dwellings shall have smoke detectors and carbon monoxide detectors; they shall be hard wired (110V) with battery backup and interconnected. Smoke detectors shall be located in every bedroom and halls outside of bedroom with in 15' of the bedroom door and each level of the home. Carbon monoxide detectors shall be within 15' of every bedroom door. Smoke detectors and carbon monoxide detectors in security systems will not be acceptable.
- K. Recessed lighting.** Recessed luminaries installed in the building thermal envelope shall be sealed to limit air leakage between conditioned and unconditioned spaces. All recessed luminaries shall be IC-rated and labeled as meeting ASTM E 283
- L. Lighting equipment.** A Minimum of 50 percent of the lamps in permanently installed lighting fixtures shall be high-efficiency lamps.

Before you begin work on a job, you are responsible for contracting the appropriate electric company. Each electric company's guidelines slightly vary and it is best to know what rules need to be followed before beginning a job.

St. Clair County is serviced by the following (7) Electric Utility Companies:

1. Ameren Illinois (800) 775-5000
2. Clinton County Electric Cooperative..... (618) 526-7282
3. Egyptian Electric..... (618) 684-2143
4. Freeburg Power (618) 539-5545
5. Monroe County Electric..... (618) 939-7171
6. Southwestern Cooperative Electric..... (618) 288-6166
7. Tri-County Electric..... (618) 244-5151

Application for Appeal. The owner of a building or structure or any other person may appeal a decision of the Electrical Inspector refusing to grant a modification to the provisions of standards and specifications applicable thereto. The Board of Appeals application for appeal may be made when it is claimed that; the true intent of the standards and specifications applicable thereto do not apply, or any equally good or better form of electrical installation can be used. (See Chapter 5 Article VI Division II – Electrical Board of Appeals)

ROUGH IN AND CIRCUITS

1. All work shall be done in a workman like manner.
2. All wiring shall be #12 AWG copper or larger excluding phone, sound, security and data etc.
3. All wiring conductors shall be copper unless provided for in the code.
4. All dwellings shall have smoke detectors; they shall be hard wired with battery back-up and shall be interconnected. Locations are to be: each bedroom, halls outside of bedrooms, within 15 feet of bedrooms and each level of the home. These are mandatory even if an alarm system is installed. New technology style detectors shall be preapproved by the authority having jurisdiction.
5. All dwelling shall have carbon monoxide detectors within 15 feet of the outside of all bedroom doors. They shall be interconnected to the smoke detectors and be both 110 volt and battery backup.
6. All conduits installed shall use proper electrical fittings, plumbing fittings are not allowed.
7. Non metallic sheathed cable (Romex) is only allowed in residential or dwellings.
8. All rough-in wiring shall be completed and made up, all wiring shall be spliced and tailed out with at least 6 inches of wire extending outside the box. All receptacles shall be tailed, feed thru on receptacles is allowed only on GFCI for down line protection.
9. All wiring in a basement 8/3 or smaller shall be installed in a chase or in drilled holes in the joists. Holes shall be drilled as to not damage the integrity of the joists. Wire larger than 8/3 may run on the bottom of the joists, but not in the center of the room.
10. Dryers, ranges and ovens shall be wired with three conductors and a ground, they shall use a four wire receptacle and not have the frame tied to neutral.
11. Sump pumps, washers, refrigerators, freezers and any other appliance which require a dedicated circuit shall have a single outlet. GFCI receptacles are not required if this article is followed.
12. All outlets in garages and accessory buildings that have floors at or below grade level, which are not intended as habitable rooms such as storage areas, work areas, unfinished areas of basements etc. shall be GFCI protected.
13. GFCI are required in crawl spaces, wet bars, all kitchen countertops, bathrooms, garages, outdoor outlets, above ground pools and receptacles within 6 feet of a sink or standing water.
14. All 120 volt, 15 and 20 amp circuits supplying outlets in bedrooms shall be Arc Fault Protected.
15. It is recommended that grounds on receptacles be installed on top.
16. All "disconnecting Means" shall be legibly marked to indicate its purpose.
17. "Working Space" requirements at all electrical equipment including meters, electric panel, air conditioning equipment etc. is enforced.
18. Illumination is required for all working spaces for service equipment, switch boards, panel boards that are installed indoors.
19. The white conductor on NM Cable (Romex) shall be identified with a continuous black tape when used as an ungrounded conductor.
20. Multiple branch circuits, where two or more branch circuits supply devices or equipment a means of simultaneously disconnecting power shall be provided.
21. Balconies, decks and porches that are accessible from inside the dwelling shall have at least one receptacle with in the perimeter of the balcony, deck or porch.
22. Raceway sealing, where a raceway enters a building or structure it shall be sealed with sealants that are identified for use with cable insulation. It shall be sealed in the conduit and around the exterior of the conduit.
23. Grounding and bonding is required on metal pipes, metal equipment, support beams, and concrete – encased electrodes stubbed up or turned out (rebar as grounds) in basements.
24. New homes or houses being remodeled require a spare switched conductor for ceiling fans and support for the ceiling fan.

25. Neutrals are required in "switch boxes" for the purpose of automatic room lighting.
26. Ground Fault circuit interrupter protection shall be provided for cables installed in electrically heated floors of bathrooms, kitchens and hydro-massage bathtubs.
27. All closet lights shall be covered (no bare bulbs are allowed) a minimum of 12 inches is required between fixture and stored material.
28. On final inspection all plates, devices and electrical components shall be installed and operational. All fixtures are to be installed, have lamps and be working, all electric work is to be complete.
29. All electric panels require circuit identification and a legible panel directory.

SERVICE

1. Minimum Dwelling service is 100 amp.
100 amp service require #3 copper or larger or #1 aluminum or copper clad aluminum or larger.
200 amp services require 2/0 copper or larger or 4/0 aluminum or copper clad aluminum or larger.
Services require #6 copper ground wire for 100 amp or #4 copper ground wire for 200 amp.
2. Entrance conductors and neutrals must be the same size and rating.
3. Neutrals shall be identified with white tape or white insulation and unbroken from the weather head thru the meter to the panel. *CONTACT UTILITY FOR METER CAN TYPE* Ameren Approved Meter Cans do not require unbroken neutrals.
4. All service entrance conductors shall be installed in conduit from the meter to the panel. When using PVC conduit it shall have a ground wire in it. There shall be no splices in these conductors.
The ground wire from the meter to the ground rod shall be in PVC conduit from meter can into earth.
6. All PVC conduit shall have the proper size ground wire in it.
7. All service panels must have a single main disconnect. On new construction, panels will have at least three spaces for future circuits.
8. Panel boxes shall be mounted with a maximum height of 6 feet 6 inches to the center of the main breaker.
9. Panel boxes are not permitted to be mounted in closets or bathrooms.
10. Panel boxes require work clearance of 36 inches wide, 3 feet deep and floor to ceiling height unobstructed area. There shall be nothing in this area, including below grade sump pump.
11. Meters shall be 5 feet 6 inches to the center of the meter above final grade.
12. Weather heads shall be a minimum height of 13 feet above ground.
13. Conduit ditches shall remain open until the inspection.
14. Service conductors shall extend 24" to 30" out of the weatherhead and be marked within 12" of the weatherhead.
15. Service conductors are required to be a minimum of ten feet over yards, decks and patios, 12 feet over driveways and 18 feet over roadways.

ILLINOIS ACCESSIBILITY CODE REGULATIONS

St. Clair County has adopted the Illinois Accessibility Code 1997 in its entirety for the unincorporated areas of the County.

ILLINOIS PLUMBING CODE REGULATIONS

St. Clair County has adopted the Illinois Plumbing Code current year in its entirety for the unincorporated areas of the County.

Any individuals who installs, alters, extends, repairs and/or maintain plumbing systems shall be an Illinois License Plumber.

Exception: The owner of single family residence being constructed for his/her own occupancy, must occupy for a period of not less than 6 months after the completion of construction of the residence.

BUILDING

The following section cover some of the most commonly asked questions and mistakes seen by inspectors.

FOOTINGS

Required footing inspections for pole buildings, piers, trenches, thickened slabs, supporting a structure bearing walls, porch, roofs, sunrooms etc.

1. 32" minimum depth.
2. Continuous including jumps.
3. One story minimum 16" x 8".
4. Two story brick 20" x 10".
5. 2 # 4 bars horizontal continuous 15" minimum lap.
6. Dowel pins #4 at 40".
7. Subgrade not frozen.
8. No water in trench.
9. Minimum 2500 P.S.I. concrete.

FOUNDATIONS

*No Inspection Required – Spot checks Only

1. 8" thick 8' high 7' backfill (#6 @ 40" o.c. or equal to vertical).
2. 8" thick 9' high 8' backfill (#6 @ 24" o.c. or equal to vertical).
3. 10" thick 8' high 7' backfill (#6 @ 56" o.c. or equal to vertical).
4. 10" thick 9' high 8' backfill (#4 @ 16" o.c. or equal to vertical).
5. 2 # 4 (horizontal) bars in top and bottom (12") of wall.
6. 10" wall where 4" brick ledge (leaves minimum 6" wall).
7. Drainage – Waterproofing.
8. Egress window or swinging door to outside required for all basements. Window sill height maximum 44" off floor.
9. Crawlspace vents within 3' of corners.

ANCHOR BOLTS

1. 1/2" galvanized anchor bolts embedded 7" into masonry or concrete every 6' minimum 4' if over (2) two stories.
2. Two bolts per plate section and one bolt within 12" from each end.
3. Plate washers (galvanized) 3"x3"x1/4" required when braced walls sit directly on foundation.

FRAMING

1. Framing 8" above grade including basement walkouts.
2. Treated wood against concrete.
3. 1/4" x 3" x 3" galvanized washer plates on braced walls directly on foundation.
4. Attic access 22" x 30".
5. Floor and roof trusses braced per manufacturer.

6. Trusses tied down.
7. Additional studs under girders.
8. Point loads supported.
9. Fire blocking.
10. Dryer vents maximum 25' deduct 5' for each 90° elbow – no screws. ALL METAL
11. Bathrooms exhaust clear to outside (not soffit).
12. Columns anchors to floor and beam.
13. Stair clearance 6'-8" vertical from front edge step, width 3' riser maximum 7 $\frac{3}{4}$ ", tread minimum 10" nose to nose.
14. Sleeping room egress window.
15. Garage floor slopes to door or drain.
16. No duct opening into garage.
17. Water heater 18" above floor.

WALL BRACING

1. No 1x4 or metal strap diagonal bracing.
2. Braced wall length limit 25' includes garage walls (3 car garage requires braced offset wall), unless within 4' of braced wall line of building.
3. One 900 square foot maximum room of residence allowed 35' wall length.
4. Corner bracing for garage door and portal openings require corner bracing with a 4:1 ratio (height to width) (8' to 2') for light frame roof only for living area above check with code official.
5. Corner bracing other walls full 48" wide structural sheathing panel at each end and at least every 25' o.c. but not less than 20% of wall for (1) one story and 45% of 1st of 2nd story.
6. For 2nd story with brick veneer corners must have tie downs from top to foundation.
7. Corner panels nail edges every 6" minimum.

FIREPLACES – MEETING CODE

1. Fire-stopped joist and rafter space.
2. Fire-stopped at every floor, ceiling or roofline around chimney area.
3. Chimney must be 2" from combustibles.
4. Chimney-less fireplaces no vents 3' of windows that open.
5. Masonry chimneys must have reinforcing bars installed.

FIRE AND GARAGE SEPARATION

1. Duplex separation walls 2 hours fire rating double wall $\frac{5}{8}$ both sides or equivalent.
2. Between garage and living area $\frac{1}{2}$ " drywall and garage ceiling.
3. Fire retardant disappearing stair in garage ceiling.
4. All penetrations at floor and ceiling levels fire blocked at wires, pipes, ducts, drop ceilings, soffits, shafts, under tubs, etc. (flash return ducts at floor).
5. Open web floor trusses – fire block every 1000 square feet.
6. Drywall walls and ceiling under accessible stairs.
7. All electrical, plumbing, and mechanical located in wall cavities will be draft stopped at floor level and top of wall.
 - a. Draft stop will be fire-rated foam.

SAFETY GLASS

Hazardous locations. The following shall be considered specific hazardous locations for the purposes of glazing:

1. Glazing in swinging doors except jalousies.
2. Glazing in fixed and sliding panels of sliding door assemblies and panels in sliding and bi fold closet door assemblies.
3. Glazing in storm doors.
4. Glazing in all unframed swinging doors.
5. Glazing in doors and enclosures for hot tubs, whirlpools, saunas, steam rooms, bathtubs and showers. Glazing in any part of a building wall enclosing these compartments where the bottom exposed edge of the glazing is less than 60 inches (1524 mm) measured vertically above any standing or walking surface.
6. Glazing, in an individual fixed or operable panel adjacent to a door where the nearest vertical edge is within a 24-inch (610mm) arc of the door in a closed position and whose bottom edge is less than 60 inches (1524 mm) above the floor or walking surface.
7. Glazing in an individual fixed or operable panel, other than those locations described in Items 5 and 6 above, that meets all of the following conditions:
 - a. Exposed area of an individual pane greater than 9 square feet (0.836 m²).
 - b. Bottom edge less than 18 inches (457 mm) above the floor.
 - c. Top edge greater than 36 inches (914 mm) above the floor.
 - d. One or more walking surfaces within 36 inches (914 mm) horizontally of the glazing.
8. All glazing in railings regardless of an area or height above a walking surface. Included are structural baluster panels and nonstructural in-fill panels.
9. Glazing in walls and fences enclosing indoor and outdoor swimming pools, hot tubs and spas where the bottom edge of the glazing is less than 60 inches (1524 mm) above a walking surface and within 60 inches (1524mm) horizontally of the waters edge. This shall apply to single glazing and all panes in multiple glazing.
10. Glazing adjacent to stairways, landings and ramps within 36 inches (914 mm) horizontally of a walking surface when the exposed surface of the glass is less than 60 inches (1524 mm) above the plane of the adjacent walking surface.
11. Glazing adjacent to stairways within 60 inches (1524 mm) horizontally of the bottom tread of a stairway in any direction when the exposed surface of the glass is less than 60 inches (1524 mm) above the nose of the tread.

EGRESS WINDOW (SLEEPING ROOM/BASEMENT)

1. Sill not more than 44" above floor.
2. Minimum of 5.7 square feet (basement) clear opening.
3. Minimum of 5.0 square feet (grade level).
4. Minimum height clears opening 24".
5. Minimum width 20" clearing opening.

STAIRWAYS

Width. Stairways shall not be less than 36 inches (914 mm) in clear width at all points above the permitted handrail height and below the required headroom height. Handrails shall not project more than 4.5 inches (114mm) on either side of the stairway and the minimum clear width of the stairway at and below the handrail height, including treads and landings, shall not be less than 31.5 inches (787 mm) where a handrail is installed on one side and 27 inches (698 mm) where handrails are provided on both sides. (R311.5.1)

Exception: The width of spiral stairways shall be in accordance with Section R311.5.8.

Headroom. The minimum headroom in all parts of the stairway shall not be less than 6 feet 8 inches (2036 mm) measured vertically from the sloped plane adjoining the tread nosing or from the floor surface of the landing or platform. (R311.5.2)

STAIR TREADS AND RISERS (DECKS INCLUDED)

Riser height. The maximum riser height shall be 7 3/4 inches (196 mm). The riser shall be measured vertically between leading edges of the adjacent treads. The greatest riser height within any flight of stairs shall not exceed the smallest by more than 3/8 inch (9.5 mm). (R311.5.3.1)

Tread depth. The minimum tread depth shall be 10 inches (254 mm). The tread depth shall be measured horizontally between the vertical planes of the foremost projection of adjacent treads and at a right angle to the treads leading edge. The greatest tread depth within any flight of stairs shall not exceed the smallest by more than 3/8 inch (9.5 mm). Winder treads shall have a minimum tread depth of 10 inches (254 mm) measured as above at a point 12 inches (305mm) from the side where the treads are narrower. Winder treads shall have a minimum tread depth of 6 inches (152 mm) at any point. Within any flight of stairs, the greatest winder tread depth at the 12 inch (305 mm) walk line shall not exceed the smallest by more than 3/8 inch (9.5 mm). (R311.5.3.2)

Profile. The radius of curvature at the leading edge of the tread shall be no greater than 9/16 inch (14.3 mm). A nosing not less than 3/4 inch (19 mm) but not more than 1 1/4 inch (32 mm) shall be provided on stairways with solid risers. The greatest nosing projection shall not exceed the smallest nosing projection by more than 3/8 inch (9.5mm) between two stories, including the nosing at the level of floors and landings. Beveling of nosing shall not exceed 1/2 inch (12.7 mm). Risers shall be vertical or sloped from the underside of the leading edge of the tread above at an angle not more than 30 (0.51 rad) degrees from the vertical. Open risers are permitted, provided that the opening between treads does not permit the passage of a 4-inch diameter (102 mm) sphere. (R311.5.3.3)

Exceptions:

1. A nosing is not required where the tread depth is a minimum of 11 inches (279 mm).
2. The opening between adjacent treads is not limited on stairs with a total rise of 30 inches (762 mm) or less.

Handrails. Handrails shall be provided on at least one side of each continuous run of treads or flight with four or more risers. (R311.5.6)

Height. Handrail height, measured vertically from the sloped plane adjoining the tread nosing, or finish surface of ramp slope, shall be not less than 34 inches (864 mm) and not more than 38 inches (965 mm). (R311.5.6.1)

Continuity. Handrails for stairways shall be continuous for the full length of the flight, from a point directly above the top riser of the flight to a point directly above lowest riser of the flight. Handrail ends shall be returned to wall or shall terminate in newel posts or safety terminals. Handrails adjacent to a wall shall have a space of not less than 11/2 inch (38mm) between the wall and the handrails. (R311.5.6.2)

Exceptions:

1. Handrails shall be permitted to be interrupted by a newel post at the turn.
2. The use of a volute, turnout, starting easing or starting newel shall be allowed over the lowest tread.

Handrail grip size. Handrails with a circular cross section shall have an outside diameter of at least 1 1/4 inches (32 mm) and not greater than 2 inches (51 mm). If the handrail is not circular it shall have a perimeter dimension

of at least 4 inches (102 mm) and not greater than 6 1/4 inches (160 mm) with a maximum cross section of dimension of 2 1/4 inches (57 mm). (R311.5.6.3)

Guards required. Porches, balconies or raised floor surfaces located more than 30 inches (762 mm) above the floor or grade below shall have guards not less than 36 inches (914 mm) in height. Open sides of stairs with a total rise of more than 30 inches (762 mm) above the floor or grade below shall have guards not less than 34 inches (864 mm) in height measured vertically from the nosing of the treads. (R312.1)

Porches and decks which are enclosed with insect screening shall be provided with guards where the walking surface is located more than 30 inches (762 mm) above the floor or grade below.

Guard opening limitations. Required guards on open sides of stairways, raised floor areas, balconies and porches shall have intermediate rails or ornamental closures which do not allow passage of a sphere 4 inches (102mm) or more in diameter. (R312.2)

Exceptions:

1. The triangular openings formed by the riser, tread and bottom rail of a guard at the open side of a stairway are permitted to be of such a size that a sphere 6 inches (152 mm) cannot pass through.
2. Openings for required guards on the sides of stair treads shall not allow a sphere 4 3/8 inches (107mm) to pass through.

**BUILDER'S STATEMENT OF UNDERSTANDING,
ACCEPTANCE AND AGREEMENT**

St. Clair County Building & Zoning Department

READ CAREFULLY AND SIGN

1. I understand, accept and agree that any permit issued for any building, electrical, plumbing or mechanical work, does not grant the privilege to erect any structure or to use any property for a purpose or in a manner prohibited by the adopted codes, ordinances or regulations of the County of St. Clair.
2. I understand, accept and agree that the responsibility for assuring that the plans for any purposed construction are in compliance with the provisions of adopted codes shall rest solely with me as the applicant.
3. I understand, accept and agree that the County Building & Zoning Office does not consider subdivision covenant restrictions when reviewing plans.
4. I understand, accept and agree that the County Building & Zoning Office does not consider American Disability Act requirement when reviewing plans.
5. I understand, accept and agree that all required setbacks for any building or structure are to be measured from property lines, the location of which be identified by stakes in the "SR", "MR", and "RR-1" zone district, and the measurements from curbs or similar landmarks can produce errors which may halt construction and require that any part of any structure built in error, be removed.
6. I understand, accept and agree that property corners will be properly staked in the "SR", "MR", and "RR-1" zone district and that said stakes will remain in place and undisturbed until after the footing/foundation inspection.
7. I understand, accept and agree that all fees for all permits must be paid prior to the issuance of any permit in accordance with Chapter 7, Article I Division IX.
8. I understand, accept and agree that permits for private sewage disposal system and private wells must be obtained from the St. Clair County Health Department.
9. I understand, accept and agree that law requires inspection of all work and that failure to request and secure such inspection is a violation of the County code.
10. I understand, accept and agree that as the applicant for a permit, I am solely responsible for notifying the Code Administrator when work has progressed to a point requiring inspection and for preventing any further work until such inspection has been made and the work determined to be in compliance with applicable codes.
11. I understand, accept and agree that any request for inspection must be made by calling the St. Clair County Building & Zoning Office between the hours of 8:00 a.m. and 4:30 p.m., Monday through Friday, at least 24 hours prior to time when the inspection is needed. The County attempts to complete each inspection within 48 hours of its request, but offers no guarantee to do so.

12. I understand, accept and agree that inspections are required at the following stages:

- ☐ **FOOTING INSPECTION**
 - Upon completion of the footing and foundation excavation, but prior to pouring any concrete
- ☐ **FOUNDATION/SLAB INSULATION INSPECTION**
 - Prior to pouring any concrete
- ☐ **UNDERGROUND PLUMBING INSPECTION**
 - Upon completion of underground plumbing, but prior to covering
- ☐ **ROUGH-IN PLUMBING INSPECTION**
 - Upon completion of rough-in plumbing but prior to insulation or covering
- ☐ **ROUGH-IN ELECTRICAL INSPECTION**
 - ☐ -Upon completion of rough-in electric, but prior to insulation or covering
 - ☐ -Pools under pool grounding
 - ☐ -Pools conduits and grounding loop around pool under sidewalks or walkways
- ☐ **ELECTRICAL SERVICE INSPECTION**
 - Upon completion of permanent service
- ☐ **FRAMING INSPECTION**
 - Prior to insulation and the covering of structural members
- ☐ **INSULATION INSPECTION**
 - Prior the covering of structural members
- ☐ **FINAL ELECTRICAL INSPECTION**
 - ☐ -Following completion but prior to occupancy
 - ☐ -Pools completion of all electrical work and equipment prior to use of pool
- ☐ **FINAL PLUMBING INSPECTION**
 - Following completion but prior to occupancy
- ☐ **FINAL BUILDING INSPECTION**
 - Following completion but prior to occupancy

ABSOLUTELY CAN NOT OCCUPY RESIDENCE UNTIL ALL FINAL INSPECTIONS HAVE BEEN COMPLETED AND OCCUPANCY PERMIT HAS BEEN ISSUED

PRIVATE SEWAGE DISPOSAL – CONTACT ST. CLAIR COUNTY HEALTH DEPARTMENT

PUBLIC SEWERS – CONTACT APPROPRIATE TOWNSHIP FOR APPLICABLE PERMITS

13. I understand, accept and agree that should any work performed under a permit issued by St. Clair County fail inspection, I am subject to a re-inspection fee, as established by law.

14. I understand, accept and agree that no Final Certificate of Zoning Compliance shall be issued until all inspection have been made and passed.

15. I understand, accept and agree that prior to occupying the building or structure I will obtain the

Revised 01/09/20

necessary Occupancy permit from the St. Clair County Building & Zoning Department.

16. I understand, accept and agree that every temporary electrical service must have G.F.I protection.

17. I understand, accept and agree that the Illinois Roofing Industry Licensing Act (225 ILCS 335)

"It is hereby declared to be the public policy of this State that, in order to safeguard the life, health, property and public welfare of its citizens, the business of roofing construction, reconstruction, alteration, maintenance and repair is a matter affecting public interest, and any person desiring to obtain a license to engage in the business as herein defined shall be required to establish his or her qualifications to be licensed as herein provided. And that is St. Clair County should issue a permit to me it does so with the understanding that I will comply with the requirements of said Act.

Nothing in this Act shall be construed to require a person who performs roofing or waterproofing work to his or her own property, or for no consideration, to be licensed as a roofing contractor. (225 ILCS 335/11(3))

18. I Understand accept and agree that all trash, debris and scrap materials must be placed into appropriate containers and disposed of properly. Burning of any kind is prohibited.

19. I understand, accept and agree that if any permitted work is not completed within six (6) months from the date a permit is issued, that permit shall become null and void.

I CERTIFY BY MY SIGNATURE BELOW, THAT I HAVE READ, UNDERSTAND, AND ACCEPT EACH OF THE PROVISIONS ABOVE, AND WILL ABIDE BY THEM AND BY THE CODES, ORDINANCES, REGULATIONS AND STATUTES OF THE COUNTY OF ST. CLAIR AND THE STATE OF ILLINOIS.

OWNER/APPLICANT SIGNATURE _____ DATE _____

PLEASE LIST YOUR CONTRACTORS

BUILDING CONTRACTOR _____ PHONE _____

ADDRESS _____

ELECTRICAL CONTRACTOR _____ PHONE _____

ADDRESS _____

PLUMBING CONTRACTOR _____ PHONE _____

ADDRESS _____

LICENSE NUMBER _____

ROOFING CONTRACTOR _____ PHONE _____

ADDRESS _____

LICENSE NUMBER _____

(Execute in Duplicate)

Application For Certificate of Zoning Compliance

Department of Zoning
Village of Millstadt
111 West Laurel
Millstadt, IL 62260

Zoning Application No. _____

Date: _____

(DO NOT WRITE IN THIS SPACE - FOR OFFICE USE ONLY)

Permanent Parcel No.: _____

Zoning fee paid to: Village of Millstadt \$ _____ Date: _____

Instructions to Applicants: All information required by this application must be completed and submitted herewith. Applicants are encouraged to visit the Office of Director of Zoning for any assistance needed in completing this form.

1. Name of Owner(s): _____ Phone: _____

Address: _____ STREET _____ CITY _____ ZIP CODE _____

2. Applicant(s) Name: _____ Phone: _____

Address: _____ STREET _____ CITY _____ ZIP CODE _____

3. Property interest of applicant:
☐ Owner ☐ Lessee ☐ Contractor ☐ Other: _____

4. Address of proposed construction: _____ STREET _____ CITY _____

5. Legal description: (Lot, block, and subdivision; or metes and bounds description and acreage.)

6. Proposed improvement (check applicable items):

☐ New building

☐ Addition or alteration (explain): _____

☐ Mobile home on permanent foundation: Year _____ Make _____
Serial # _____ Size _____

☐ Modular Home

☐ Other (explain): _____

☐ Brick No. of Rooms: _____

☐ Frame No. of Stories: _____

☐ Metal Sq. Ft. of Improvement: _____

Cost of Improvement: _____

7. Utilities: ☐ Public Water Service ☐ Public Sewer Service

☐ Well or Cistern

☐ Septic Tank/Aeration

☐ Other: _____

☐ Other: _____

8. Is any type of business presently operated at this location: ☐ Yes ☐ No

9. Zone district classification: _____

10. 100 year flood elevation: _____

11. Use of existing structures:

Residential: ☐ Single Family

☐ 2 Family

☐ Multi-Family:

No. of Units _____

☐ Vacant Lot

☐ Business (type) _____

☐ Industrial (type) _____

☐ Other: _____

12. Use of Proposed Structure:

Residential:

☐ Single Family

☐ 2 Family

☐ Multi-Family:

No. of Units _____

Accessory:

☐ Garage

☐ Carport

☐ Storage Shed

☐ Other: _____

☐ Business

Type: _____

☐ Industrial

Type: _____

☐ Other: _____

13. Attach or draw below two copies of a site plan showing the following information:

Dimensions of: Lot, buildings, driveways, and off-street parking spaces.

Distance between: Buildings and front, side, and rear lot lines;

Principal building and accessory buildings;

Principal building and principal buildings on adjacent lots.

Location of: Signs, easements, underground utilities, septic tanks, tile fields, water wells, etc.

Any additional information as may reasonably be required by the Director of Zoning and applicable requirements of Section 2.04 (e).

5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	115	120	125	130	135	140	145	150	155	160
10																															
15																															
20																															
25																															
30																															
35																															
40																															
45																															
50																															
55																															
60																															
65																															
70																															
75																															
80																															
85																															
90																															
95																															
100																															
105																															
110																															
115																															
120																															
125																															
130																															
135																															
140																															

1/4 INCH EQUALS 5 FEET

14. Application is hereby made for a Temporary Certificate of Zoning Compliance as required under the Zoning Ordinance of Millstadt, Illinois, for the erection, moving or alteration, and use of buildings and premises. In making this application the applicant represents all of the above statements and any attached maps and drawings to be a true description of the proposed new or altered uses and / or buildings. The applicant agrees that the permit applied for, if granted, is issued on the representations made herein and that any permit issued may be revoked without notice on any breach of representation or conditions.

It is understood that any permit issued on this application will not grant right or privileges to erect any structure or to use any premises described for any purpose or in any manner prohibited by the Zoning Ordinance, or by the other ordinances, codes or regulations of the Village of Millstadt.

Applicant: _____

TEMPORARY CERTIFICATE OF ZONING COMPLIANCE

The plans and specifications submitted with this Application are in conformity with the zone district requirements applicable to the subject property. Changes in plans or specifications shall not be made without written approval of the appropriate village officials.

Failure to comply with the above shall constitute a violation of the provisions of the Millstadt Zoning Ordinance.

Permit issued this _____ day of _____, 20____

Director, Department of Zoning
Village of Millstadt

St. Clair County Assessor's Report

Instructions to Applicants/Municipality: Fully completed application must be submitted to the St. Clair County Assessor's Office, 10 Public Square, Belleville, IL 62220.

Date _____ Parcel # _____ Projected Date of Completion _____
Name of Owner _____ Owner's Current Phone # _____
Owner's Current Address (Street, City & Zip) _____
Site's Full Address (Street, City & Zip) _____
Contractor's Company/Name _____ Phone _____
Contractor's Address (Street, City & Zip) _____
Legal Description of Parcel (Lot, block & subdivision) _____

Proposed Improvement (check applicable items)

- ☐ New building
☐ Addition or alteration (explain) _____
☐ Other (explain) _____
☐ Brick # of Rooms _____ # of Stories _____
☐ Frame Sq. Ft. of Improvement _____
☐ Metal Cost of New Structure or Improvement _____

Proposed Use of Structure (check applicable items)

- ☐ Residential: ☐ Misc: ☐ Garage ☐ Business
☐ Single Family ☐ Carport ☐ Industrial
☐ 2 or 3 Family ☐ Storage Shed ☐ Type: _____
☐ Multi-Family ☐ Other: _____
of Units _____

☐ Other (fully explain) _____
Signature of Applicant _____ Date _____

FOR OFFICE USE ONLY

Municipality Submitting Application _____ VILLAGE OF MILLSTADT
Municipality Address _____ 111 WEST LAUREL STREET, MILLSTADT, IL 62260
Municipality Phone # _____ 618-476-1514 Permit # _____

Complete for:
In-Ground Pools or
New Construction with Basement



COUNTY OF ST. CLAIR

DEPARTMENT OF BUILDING & ZONING

PHONE (618) 277-6600
FAX (618) 277-0482

10 PUBLIC SQUARE
BELLEVILLE, ILLINOIS 62220-1623
www.co.st-clair.il.us

Storm Water Questionnaire for Building Permit Applicants

- | | Yes | No |
|--|--------------------------|--------------------------|
| 1. Does the project include 10,000 sq. ft., or more of total impervious surface? (i.e., streets, roof, patio, parking area, or combination thereof) (For a home with 2,000 sq. ft. of roof area and 1,000 sq. ft. of driveway and sidewalks with no basement, the answer would be no with basement answer would be yes. For a building with 5,000 sq. ft. of roof area and a 6,000 sq ft. paved parking area the answer would be yes - 11,000 sq. ft.) | ☐ | ☐ |
| 2. Does the project involve land disturbing activity that will affect an area of 1 acre, or more? (Land disturbing activity includes clearing, grading, stripping, excavating, filling, or any combination thereof.) | ☐ | ☐ |
| 3. Does the project involve land disturbing activity that will exceed 100 cu. yds. (An area 18 ft. (length) x 18 ft. (width) x 9 ft. (height) divided by 27 = 108 cu. yds.) | ☐ | ☐ |
| 4. Does the project involve land disturbing activity within 25 ft. of any channel? (as defined in the County's Storm Water Ordinance, generally, any water body, sinkhole, or water conveyance, natural or man-made.) | ☐ | ☐ |
| 5. Does the project involve any land disturbing activity on the sloping side of the slope disturbance line? (The line which delineates relatively level building areas from areas where slopes exceed a ratio of 3:1 (Horiz./Vert.)) | ☐ | ☐ |
| 6. Are you constructing a pond or lake? | ☐ | ☐ |
| 7. Are you changing natural drainage on the site? | ☐ | ☐ |
| 8. Is this work to be done on a subdivision that has an approved sediment/erosion control plan? | ☐ | ☐ |

If the answer to any of the above questions is yes, a permit will be required under the County's Storm Water and Sediment Control Ordinance. (Ord. 09-989 06/30/09)

I certify by my signature below, that I have read and understand each of the above questions, and that the answers given are true and complete, to the best of my knowledge and belief. I understand that, if the project changes so that the answer to any of these questions becomes yes, a Storm Water and Sediment Control permit will be required.

Signature _____

Date _____

Residential Fire Sprinkler Waiver

Department of Zoning & Building
Office of Director
St. Clair County Building
Belleville IL 62220-1623

Zoning Application No. _____
Date: _____

(DO NOT WRITE IN THIS SPACE - FOR OFFICE USE ONLY)

Permanent Parcel No: _____

Instructions to Applicants: All information required by this application must be completed and submitted herewith.

1. Name of Owner(s): _____ Phone: _____

Address: _____
STREET CITY ZIP CODE

2. Contractor: _____ Phone: _____

Address: _____
STREET CITY ZIP CODE

3. Address of proposed construction _____
STREET CITY

4. Was the option of installing a fire sprinkler system offered to you by the constructor or contractor representative? YES NO

5. Were you given a printed informational sheet about residential sprinklers?
YES NO

6. Were you given cost estimate for the installation of residential sprinklers?
YES NO

7. Did you choose to purchase a residential sprinkler system for your new residence?
YES NO

8. If not, what was the reason for the decision?

- a. Cost
- b. Do Not believe it is necessary
- c. Maintenance/Accidental Discharge Concerns
- d. Uncertainty

I understand that the 2012 International Residential Code requires sprinkler systems in new residential construction and I understand that by signing below I waive this section of the Code.

Applicant: _____ Date: _____

Ord No. _____ 03/24/2017